
Total 45 DTM

1K DIRECT ADHESION ANTICORROSIVE PRIMER-FINISH

- 3 in 1 = Primer, Finish, Anticorrosive
- DTM - applicable directly on steel

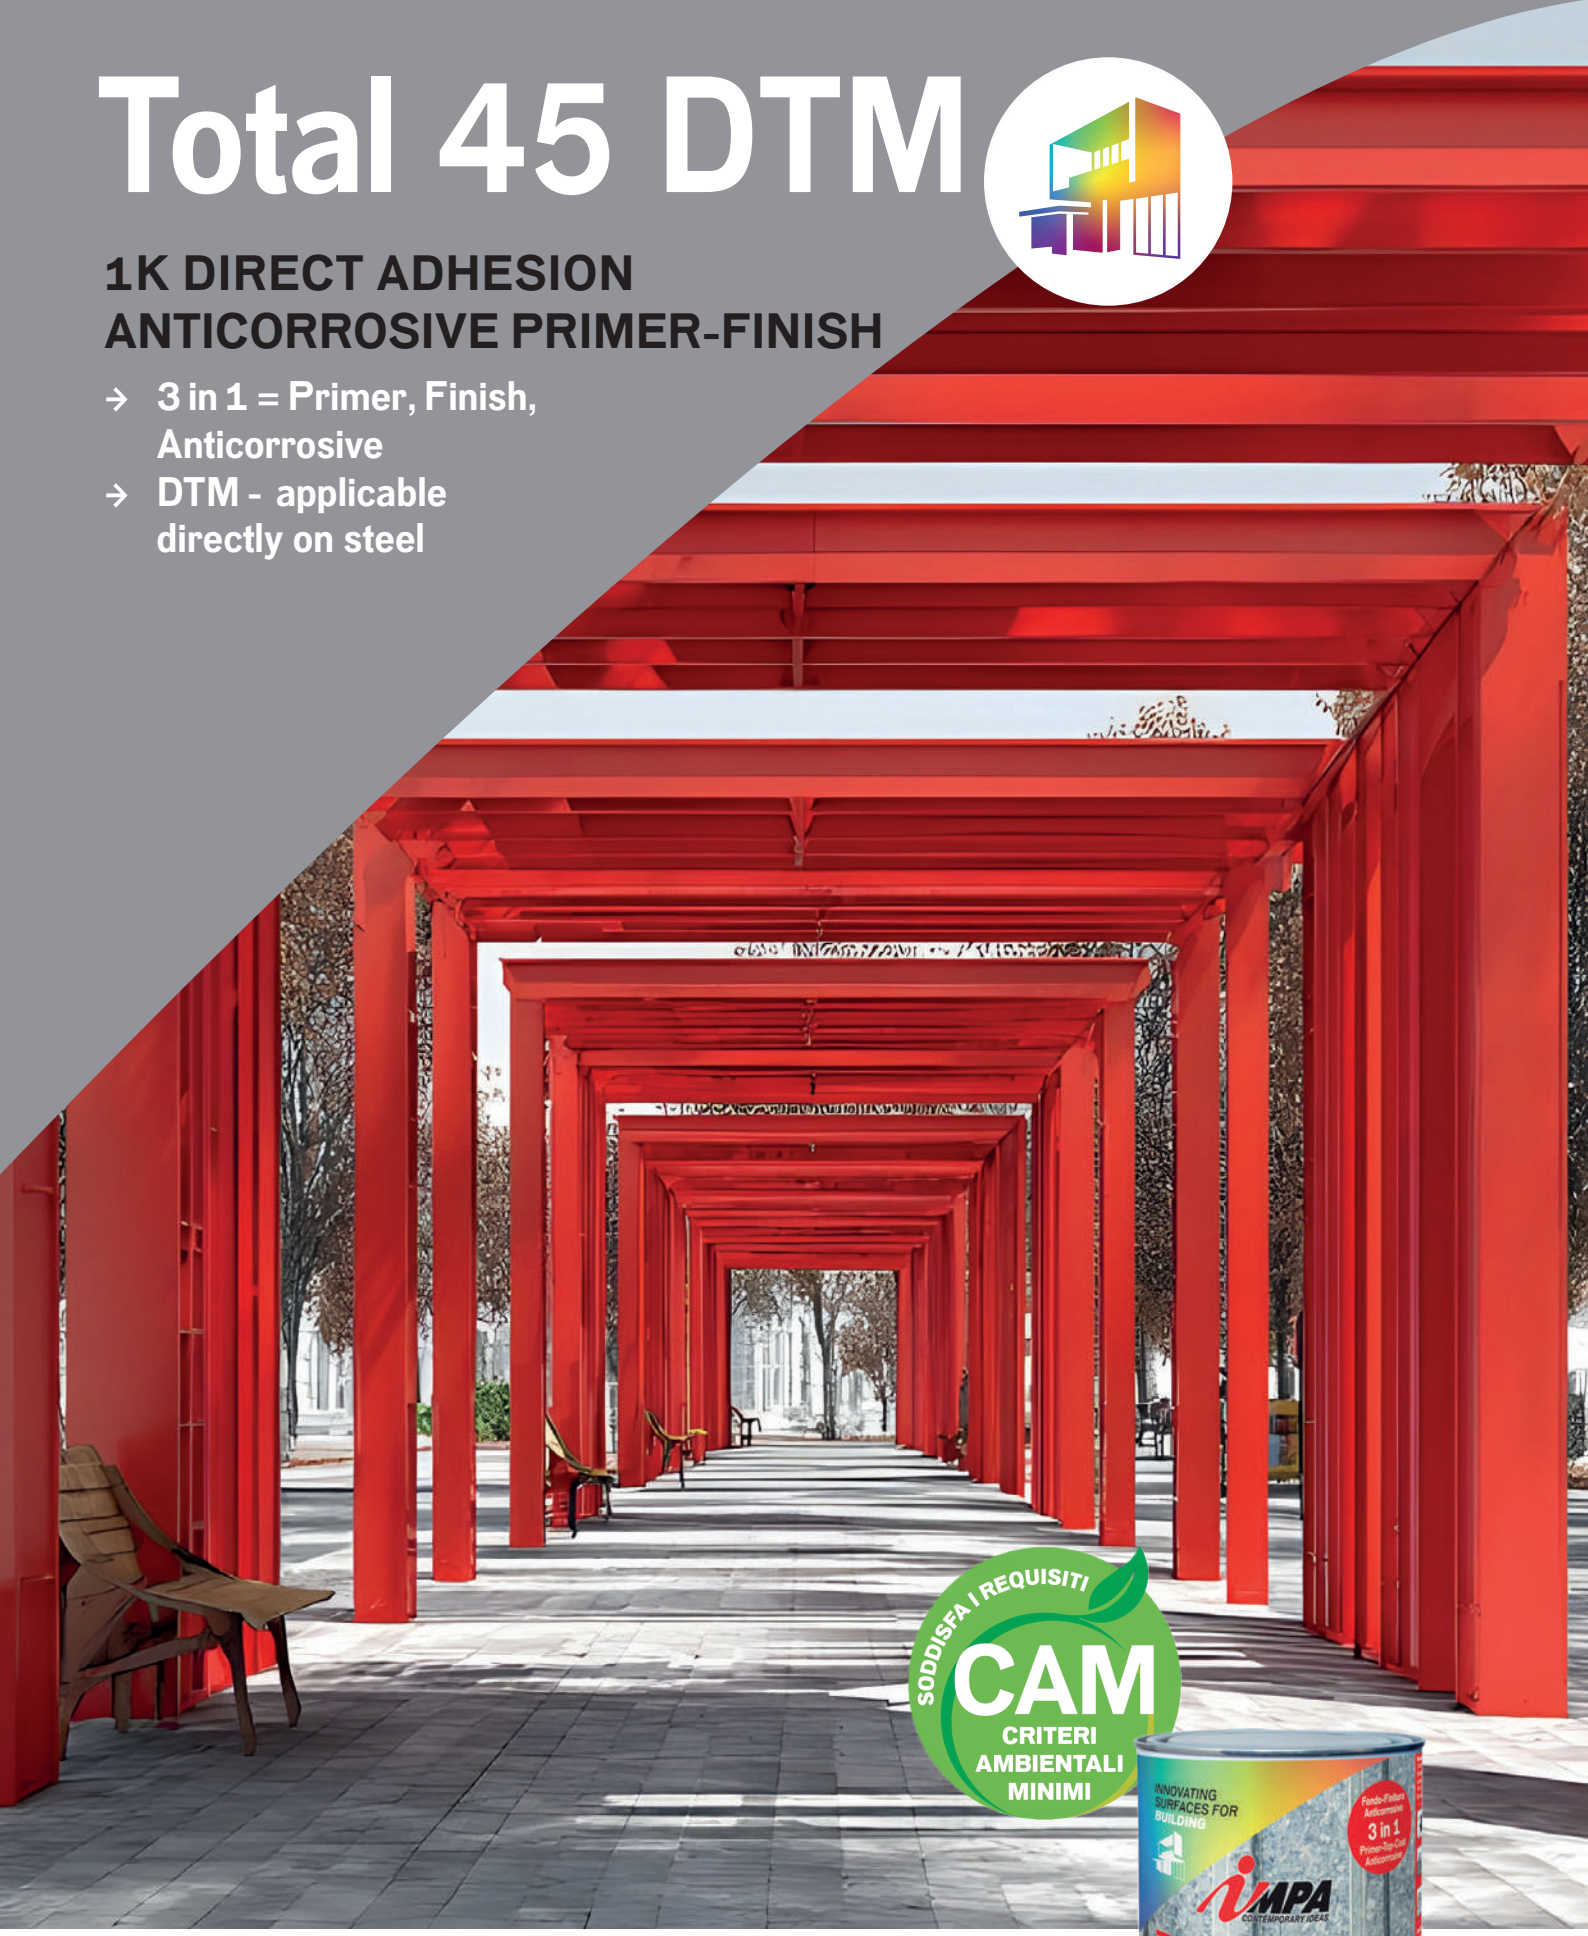

SODDISFA I REQUISITI
CAM
CRITERI AMBIENTALI MINIMI

IMPA CONTEMPORARY IDEAS

INNOVATING SURFACES FOR ***BUILDING***

Total 45 DTM

1342

1K DIRECT ADHESION ANTICORROSIVE PRIMER-FINISH



- → **3 in 1 = Primer, Finish, Anticorrosive**
- → **DTM - applicable directly on steel**
- → **Appearance satin**
- → **Excellent brushability**
- → **The product complies with CAM 2025 requirements for outdoor use**

TOTAL 45 DTM is a single-component satin finish based on acrylic and alkyd resins, specifically developed to provide outstanding performance in terms of adhesion, corrosion protection, and application versatility.
Thanks to its DTM (Direct To Metal) technology, the product can be applied directly onto metal surfaces without the need for a primer, greatly simplifying the coating process while reducing application time and costs.
The product is suitable for the protection and decoration of a wide range of substrates, including:
iron and steel, galvanized steel (hot-dip or electro-galvanized), aluminum and light alloys, copper. It also offers good adhesion on substrates such as PVC and PLEXIGLASS.

Ideal for applications in craftsmanship and fabrication, construction and shipbuilding, maintenance and refurbishment, light industrial applications, metal fabrication, metal furniture and fittings.

In addition to providing effective corrosion protection, it delivers an elegant satin finish, offering a modern and uniform appearance that enhances the aesthetic value of any surface.

The product can be tinted through the ADVANCE HT tinting system, allowing the creation of a wide range of colors to meet both technical and aesthetic requirements.

Tools

Brush, Roller and Spray gun

Technical features

Appearance	satin 30-40 gloss (Gardner 60°)
Repaintability	after 18 - 24 h
Dust free	30 min
Touch free	4 - 6 h
Through drying	24 – 36 h
Recommended thicknesses	60 µm dry film
→ Dilution	max 5% of 1602 ACQUARAGIA /1603 DILUENTE SINTETICO
→ Cover rate	7 m²/kg with 2 coats

AUTHORIZED DEALER

IMPA S.p.A. Unipersonale – Via Crevada, 9/E
31020 San Pietro di Feletto TV – ITALY
T +39 0438 4548
info@impa.it – www.impa.it

Company under the management
and coordination of Fassa S.r.l.