


0401 IMPASTUK UNIVERSAL EXTRA

PUTTY PASTE, QUICK DRYING

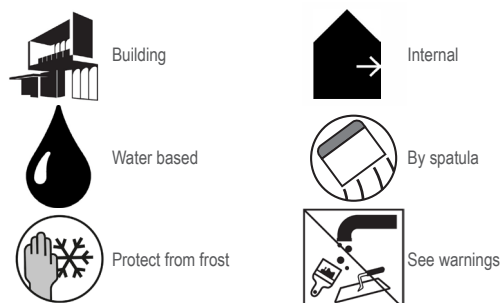

Advantages

- Easy to apply
- Ready-to-use
- Quick drying

Description and Use

Ready-to-use putty paste, easy to apply, offering quick drying and excellent sandability. Suitable for levelling and smoothing inside on wood, walls and plasterboard.

Substrate preparation

Surfaces must be clean, without mould or humidity.

Application

Application method:

- by spatula

To fill up thick cracks, apply several subsequent layers of IMPASTUK UNIVERSAL EXTRA not exceeding 7-8 mm total, and allow at least one hour between them.

Product preparation:

Ready-to-use

Sanding:

after 1-2 hours

Recoating:

with water-based products or solvent-type.

Storage life

PROTECT FROM FROST. Store the packaged product at a temperature between +5°C and +35°C.

If stored in a cool, dry place, away from sources of heat and sheltered from sunlight, in its sealed original packaging, the product has a shelf life of 18 months. Check the product's shelf life by referring to the production batch number shown on the packaging. The batch number is made of eight numeric characters in which the first four digits identify the year and month of production. Once the product has expired, it must be disposed of in accordance with the current legislation.

Technical features

Colour	see colours card
Binder	vinyl dispersion
Specific weight	1.65 kg/l (± 0.02)
Indicative actual yield	1 m ² /kg per 500-600 μ m thickness
The data are measured at a temperature of 20°C.	

Warnings

- The product contains synthetic polymer microparticles (SPM).
- **INSTRUCTIONS TO PREVENT THE RELEASE OF SYNTHETIC POLYMER MICROPARTICLES INTO THE ENVIRONMENT**
- In accordance with Regulation (EU) 2023/2055, please follow the procedures below to prevent environmental release.
- During use and application, avoid accidental release of the product onto soil, into drains, or household wastewater. Apply the product only to the surfaces to be treated.
- Any remaining product should be stored by tightly sealing the original container. Dispose of the product/container in accordance with national regulations.
- If you wish to reuse the tools used for application, follow these steps to clean them in an environmentally responsible manner.
- The water, solvents or thinners used for cleaning tools, as well as any product residues, MUST NOT be released into the environment or poured down domestic drains.
- Remove as much product as possible from the tools used.
- Soak the tools in hot water or in solvent for at least a couple of hours, then remove them from the container.
- Allow the water in the bucket to evaporate and let the tools dry. For solvent-based products, close the container. Do not release the product into the environment and do not pour it into drains.
- Deliver the container with any remaining product / wash water / solvent / cleaning thinner to an authorised waste collection centre, in accordance with national regulations.
- Product recommended for expert users.
- Read the safety datasheet before use.
- Surface and ambient temperature must be above + 5 (41°F) and below 35°C (95°F).
- Acquire all the material required to finish the work of the same batch.
- During use, ventilate the room well and use water to clean tools.
- The information provided on this technical datasheet is based on our technical and practical knowledge and experience. The technical data refer to the average characteristics of the basic product and are determined under controlled laboratory conditions. The variability of the natural raw materials available on the market and the tinting of the product can lead to slight deviations in the declared values, in the colour and in the aesthetic effects obtained. It is therefore necessary for the purchaser/user to personally verify, before application, the suitability of the product for the intended use, in particular when different lots of the same material are used in the same job/site.

Do not apply when the relative humidity exceeds 75%.

The above mentioned data are meant to facilitate our customers in the use of our products. IMPA is not responsible for applications of products carried out beyond its direct control. For further technical information about specific systems and/or special applications, please contact our TECHNICAL SERVICE at assistenza.tecnica@impa.it.