
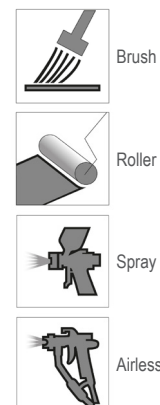


0218 INTENSA

TRANSPIRING WALL PAINT FOR INTERIOR USE, HIGH HIDING POWER ALSO ON PLASTERBOARDS



Advantages

- High covering properties
- For large surfaces

Description and Use

INTENSA is a breathable water-based paint based on vinyl copolymers, pleasant opaque appearance, characterized by high hiding power, good expansion and good white balance.

It allows to obtain excellent results, especially on large surfaces; it is indicated for application on properly treated gypsum plasterboard, and for all internal surfaces which require a good breathability as in kitchens, bathrooms, etc..

It can be applied on lime-based plasters, mortar of cement and cement products in general.

Substrate preparation

The substrate must be cured, not chalking and clean (without grease, oil or other polluting agents).

For degraded surfaces, remove all traces of old peeling paint and any efflorescence.

In case of mould or algae growth, carry out a treatment with DECISO code 0610.

On plaster, level any unevenness with a suitable levelling compound, and allow the treated areas to rest; fill and rub down holes, cracks and crackles with IMPASTUK UNIVERSAL EXTRA code 0401.

On new, powdery or highly absorbing plaster, on fillings or old flaking paints, apply one layer of masonry fixative to make uniform the substrate absorption. Our suitable products are POLY ACRYL code 0004, otherwise SUPERFIX code 0010 or GREY FIX code 0011, properly diluted.

Once dried, continue applying two coats of INTENSA.

Application

Application method:

- brush
- roller
- spray
- airless

Product preparation:

Mix to achieve even colour and consistency.

Dilution:

by weight : 30-35 % of water for the first coat, 25-30% for the second coat.

by volume: 45-50% water for the first coat, 35-45 for the second one.

Recoating:

wait 3-4 hours between the two coats.

Storage life

PROTECT FROM FROST. Store the packaged product at a temperature between +5°C and +35°C.

If stored in a cool, dry place, away from sources of heat and sheltered from sunlight, in its sealed original packaging, the product has a shelf life of 24 months. Check the product's shelf life by referring to the production batch number shown on the packaging. The batch number is made of eight numeric characters in which the first four digits identify the year and month of production. Once the product has expired, it must be disposed of in accordance with current legislation.

Technical features

Colour	white
Binder	vinyl dispersion
Appearance of the dry film	matt (UNI 10795)
Specific weight	1.78 kg/l (± 0,02)
Viscosity	26003 - 30000 mPa.s Brookfield RVT rpm 20 s 6
Practical cover rate *	4-5 m ² /l per two layers
EU limit value of VOC content (Directive 2004/42/EC)	Cat. A/a, WB: Max VOC 30 g/l product VOC < 30 g/l
* The yield may vary according to the roughness and absorption of the substrate and in relation to the application system used.	
The data are measured at a temperature of 20°C.	

Warnings

- Product recommended for professional use.
- Read the safety datasheet before use.
- Solvents or thinners used for cleaning tools, as well as any product residues, must not be released into the environment or poured down domestic drains. The recipient/product/thinner or cleaning solvent must be disposed of in accordance with national regulations.
- Surface and ambient temperature must be above + 5 (41°F) and below 35°C (95°F).
- Acquire all the material required to finish the work of the same batch.
- During use, ventilate the room well and use water to clean tools.
- The information provided on this technical datasheet is based on our technical and practical knowledge and experience. The technical data refer to the average characteristics of the basic product and are determined under controlled laboratory conditions. The variability of the natural raw materials available on the market and the tinting of the product can lead to slight deviations in the declared values, in the colour and in the aesthetic effects obtained. It is therefore necessary for the purchaser/user to personally verify, before application, the suitability of the product for the intended use, in particular when different lots of the same material are used in the same job/site.

Do not apply with an RH above 75%.

The above mentioned data are meant to facilitate our customers in the use of our products. IMPA is not responsible for applications of products carried out beyond its direct control. For further technical information about specific systems and/or special applications, please contact our TECHNICAL SERVICE at assistenza.technica@impa.it.